


UH200 - UHMW Hose

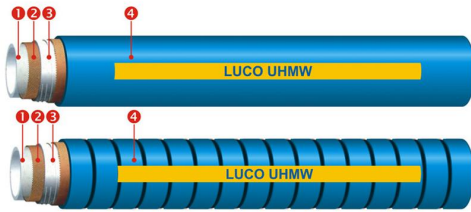

Application: For use with highly corrosive / aggressive chemicals. It will handle almost of all known industrial chemicals.

Temperature: -40°C~+70°C

Inner tube: UHMWPE

Reinforcement: High tensile cord with flexible helix steel wire

Cover: Ozone and abrasion resistant, smooth EPDM blend which also resists general chemical & hydrocarbon exposure.

Part. No	Hose I.D.		Hose O.D		Max. Length		Working Pressure		Min Burst Pressure	
	in	mm	mm	in	m	ft	bar	psi	bar	psi
LH-UH200-019	3/4	19	35	1.614	61	200	15	200	45	600
LH-UH200-025	1	25	41	1.614	61	200				
LH-UH200-032	1-1/4	32	48	1.890	61	200				
LH-UH200-038	1-1/2	38	54	2.126	61	200				
LH-UH200-051	2	51	67	2.638	61	200				
LH-UH200-063	2-1/2	63	81	3.189	61	200				
LH-UH200-076	3	76	95	3.740	61	200				
LH-UH200-102	4	102	120	4.724	61	200				