


## Welding Hose

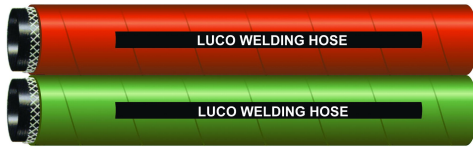

**Application:** For transmission of oxygen and acetylene for welding

**Temperature:** -25 °C ~ +75 °C

**Inner tube:** Black smooth synthetic rubber

**Reinforcement:** High tensile cord

**Cover:** Anti oxidation, corrosion resistant synthetic rubber compound

Part. No	Hose I.D.		Hose O.D		Max.Length		Working Pressure		Min Burst Pressure	
	in	mm	mm	in	m	ft	bar	psi	psi	psi
LH-WED300-005	3/16	5	12	0.472	200	660	20	300	60	900
LH-WED300-006	1/4	6	13	0.512	200	660				
LH-WED300-008	5/16	8	15	0.591	200	660				
LH-WED300-010	3/8	10	17	0.669	200	660				